




C315.60.C2.M Load Cell Platform Scale

More information on the website
radwag.com/en/info,w1,LCR

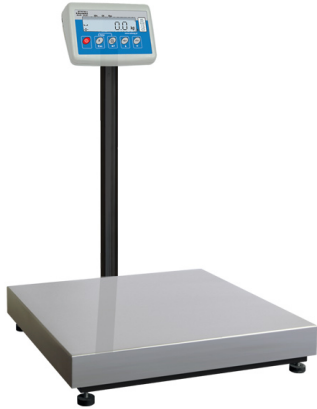

C315.60.C2.M Load Cell Platform Scale

Functions



Plus/Minus Control



Percent Weighing



Totalizing



Parts counting



Internal battery



Peak hold



Newton unit
measurement



GLP Procedures



Animal weighing



ALIBI Memory

Datasheet

C315.60.C2.M Load Cell Platform Scale	
Metrological parameters	
Maximum capacity [Max]	60 kg
Minimum load	400 g
Readability [d]	20 g
Tare range	-60 kg
Verification scale interval [e]	20 g
Max readability for non-verified scale	2 g
OIML Class	III
Physical parameters	
Display	LCD (backlit)
Weighing pan dimensions	400×500 mm
Packaging dimensions	720×620×210 mm
Net weight	12,8 kg
Gross weight	14,8 kg
Communication interface	
RS232 Interface	1× standard, 1× option
Electrical parameters	
Power supply	100 ÷ 240 V AC 50/60 Hz and battery
Power consumption max.	5 W
Operation time on batteries	max 8h
Environmental conditions	
Operating temperature	-10 ÷ +40 °C
Storage temperature	-10 ÷ +50 °C
Relative humidity	10% ÷ 85% RH no condensation
Construction	
Construction	mild steel St3S



Accessories

Receipt Printer
Cigarette lighter receptacle power supply cables
Displays
Granite Antivibration Tables
RS 232 – Ethernet Converter

RS 232, RS 485 cables
RS 232 – USB Converter
RS 232 cables (scale - EPSON printer)
RS 232 – RS 485 Converter


Software

RAD-KEY
LabVIEW Driver
R-LAB

RW Tool
R Panel
Scales Editor 2.0

Device dimensions




C315.60.C2.M Load Cell Platform Scale

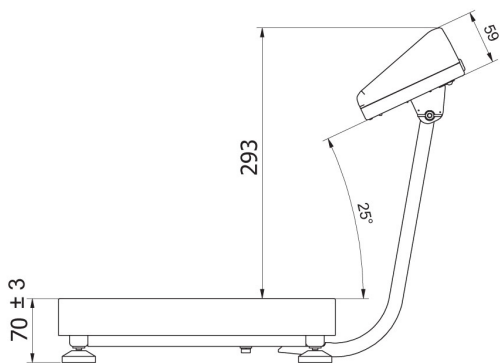


C315.F1.M



C315.F1.R

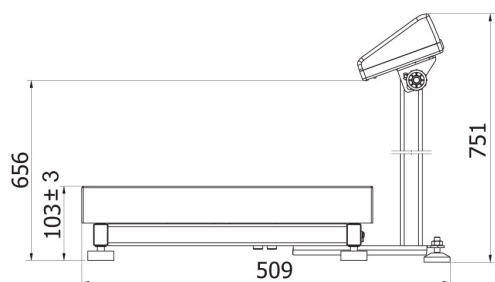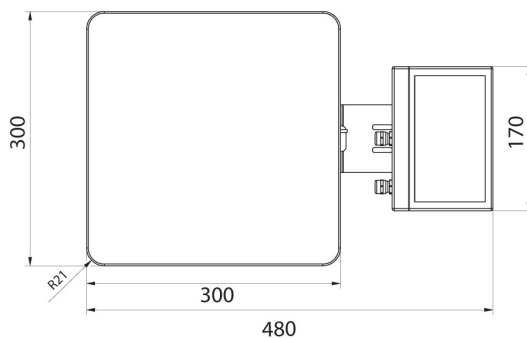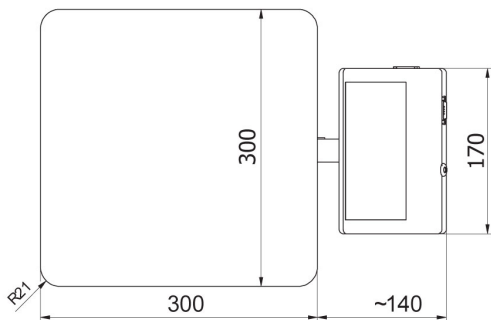

C315.C2.M



C315.C2.K

